


BEGA**24 881**

Recessed luminaire



Project · Reference number

Date

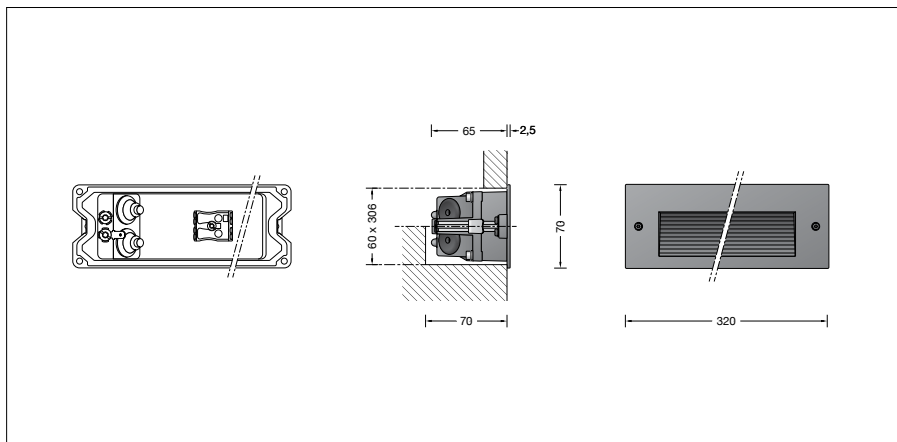

Product data sheet

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
BEGA Tricoat® coating technology
Colour graphite or silver
Clear safety glass
Reflector surface made of pure aluminium
Silicone gasket
Fixing is achieved by using two adjustable
wedge-shaped claws
Required recessed opening 306 x 60 mm
Recessed depth 70 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
BEGA Ultimate Driver®
Complies with flicker requirements in
accordance with IEEE 1789,
DIN IEC/TR 63158, DIN IEC/TR 61547-1
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-280 V
BEGA Thermal Control®
Temporary thermal regulation to protect
temperature-sensitive components without
switching off the luminaire
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK08
Protection against mechanical
impacts < 5 joule
 – Safety mark
 – Conformity mark
 Weight: 0.9 kg
 This product contains light sources of energy
efficiency class(es) C

Application

Luminaire for installation in walls and staircases
for flush or surface-mounted installation.
Luminaire for the uniform and glare-free
illumination of ground surfaces.

Lamp

Module connected wattage	8 W
Luminaire connected wattage	9.1 W
Module designation	LED-1573/83040
Colour rendering index	CRI > 80
Rated temperature	$t_a = 25^\circ\text{C}$
Ambient temperature	$t_{a\text{ max}} = 55^\circ\text{C}$
When installed in heat-insulating material	$t_{a\text{ max}} = 45^\circ\text{C}$

The colour temperature of the luminaire can be
set optionally to 3000K (factory setting) and
4000K.

Operation at colour temperature	3000 K
Module luminous flux	1395 lm
Luminaire luminous flux	594 lm
Luminaire luminous efficiency	65,3 lm/W

Operation at colour temperature	4000 K
Module luminous flux	1415 lm
Luminaire luminous flux	602 lm
Luminaire luminous efficiency	66,2 lm/W

Service life · Ambient temperature

Rated temperature $t_a = 25^\circ\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L80 B50) 100,000 h (L90 B50)

Ambient temperature max. $t_a = 55^\circ\text{C}$ (100 %)	
LED psu:	50,000 h
LED module:	140,000 h (L80 B50)

Lighting technology

Luminaire data for the DIALux lighting design
program for outdoor lighting, street lighting
and indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.

Dark Sky

For installation with light emission downwards,
the light from this luminaire is directed evenly
and highly efficiently onto the surface to be
illuminated. No light is emitted at all into the
upper half-space of the luminaire.

Ratio of luminous flux

Luminous flux upper half-space	0,1 %
Luminous flux lower half-space	99,9 %

BUG rating according to IES TM-15-20:

0–0*–1

CEN Flux Code according to EN 13032-2:

16–60–90–100–100

* The measured value above 90° including stray
light (reflection on the luminaire housing) is U1.
However, the luminaire does not emit direct
light upwards - due to the upper luminous flux
component (less than 0.5%), the value U0 is
assigned. Further information on request.

Inrush current

Inrush current: 5 A / 40 μs

Maximum number of luminaires of this
type per miniature circuit breaker:

B 10 A: 50 luminaires

B 16 A: 50 luminaires


C 10 A: 80 luminaires

C 16 A: 80 luminaires

BEGA Tricoat®

BEGA Tricoat® is a protected trademark for
a technology that we use in order to achieve
optimal corrosion resistance. These carefully
coordinated inorganic and organic coating
processes applied to extremely resistant alloys
ensure the best possible surface protection and
outstanding corrosion resistance.

Light distribution



Accessories

- 10 426** nstallation housing for recessed
installation in walls made of concrete
or plastered brickwork
- 13 521** Installation housing for installation in
insulated façades (EWIS)
- 10 026** Plaster frame surface-mounted
- 13 505** Plaster frame flush

Article No. 24 881

Colour graphite or silver
graphite – article number
silver – article number + **A**

A separate instructions for use can be provided
upon request.